




Description	Molded Heavy Duty cable for use with TT & LH sensors
xxx	Cable length in feet. (005=5ft, 015=15ft, 025=25ft, 050=50ft, 100=100ft)
Cable	T2MTxxxP0 - 5 Pair -Black Heavy Duty Polyurethane Jacket (ABC3936)
Connector	Female Molded RB Connector (400755-3)

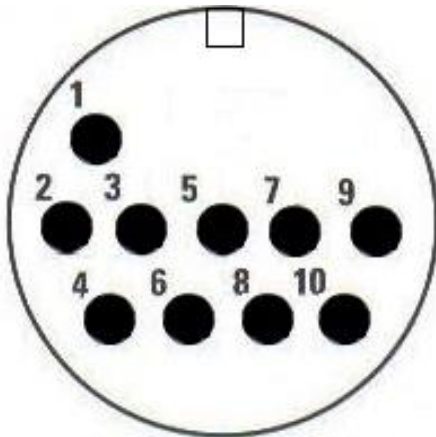

**Viewed from End
of Connector**

RB 10Pin	Color	Function		
		Neuter	DPM	RPM
1	White	DC Ground	DC Ground	DC Ground
2	Brown	Frame	Frame	Frame
3	Gray	Not Used	(-) Gate	(-) Start/Stop
4	Pink	Not Used	(+) Gate	(+) Start/Stop
5	Red	+15V (VCC)	+15V (VCC)	+15V (VCC)
6	Blue	-15V (VEE)	-15V (VEE)	-15V (VEE)
7	Black	Amp Return (Gnd)	Not used	Not used
8	Violet	Amp Out (Return Pulse)	Not used	Not used
9	Yellow	(+) Interrogation	(+) Interrogation	(+) Interrogation
10	Green	(-) Interrogation	(-) Interrogation	(-) Interrogation

Cable Spec

Cable	ABC 3936 - Twisted 5 Pair, Shielded with drain
Cable Jacket	Heavy Duty Black Polyurethane
Cable Conductor	24 AWG 7/32 stranded copper
Cable Shield	Un-terminated at Connector.
Temperature Range	-40C to +98C
Nominal Overall OD	0.350" ± .010"